



Forend Pistol Grip

Installation Instructions

PART# FPG0100, A.5.20.2495

Thank you for purchasing an ATI product!

Advanced Technology
INTERNATIONAL



Forend Pistol Grip Installation

Point the rifle in a safe direction and place the safety in the "on" position. Next remove the magazine, pull back the bolt, and carefully inspect the chamber to be sure the rifle is unloaded.

Step #1

Remove the screw, washer and nut from the pistol grip handle base. Slide the pistol grip onto the picatinny rail to the desired location. Be sure the finger grooves of the pistol grip face forward.



Figure 1

Step #2

Insert the screw through the washer and replace the screw into the round hole on the pistol grip. Thread nut onto screw and tighten until snug.

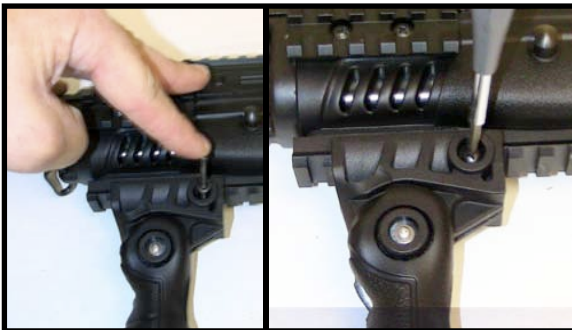


Figure 2

Step #3

To adjust the angle of the pistol grip, press the button on the left side of the pistol grip and rotate until it snaps into place.



Figure 3



CONTENTS:

- 1 - Forend Pistol Grip
- 1 - 6-32 x 1 1/4" Phillips Head Screw
- 1 - 6-32 Hex Nut
- 1 - Washer

Advanced Technology International • Made In the USA • Limited Lifetime Warranty

2733 West Carmen Ave • Milwaukee, WI 53209

Toll Free: 800.925.2522 • Fax: 414.464.3112