



# Tactical Top Folding Stock

## Installation Instructions

**PART# TFS0600, MTF4900, A.1.20.1155, A.1.40.1155**

(Fits: 12 Ga Mossberg 500/535/590/835, Remington 870, Winchester 1200/1300, Maverick 88)

Thank you for purchasing an ATI product!

**Advanced Technology**  
INTERNATIONAL



### Stock Installation

**Point the shotgun in a safe direction and place the safety in the "on" position. Next, cycle the shotgun and carefully inspect the chamber to be sure the shotgun is unloaded.**

#### Step #1

Remove the existing recoil pad from your stock by unscrewing the two phillips head screws in the rear of the pad.



Figure 1

#### Step #2

Use a long flat head screwdriver or the appropriate socket with extension to remove the stock bolt from the inside of the opening in the rear of the stock.



Figure 2

#### Step #3

Select the correct adapter for your shotgun. The Mossberg and Maverick require no adapters. The Remington/Norinco and Winchester adapters are marked.

#### Step #4

Select the mounting bolt supplied for your shotgun. Note: Norinco 98 Series is for Law Enforcement only, a metric 6 x 50mm bolt must be purchased for the Norinco shotgun.

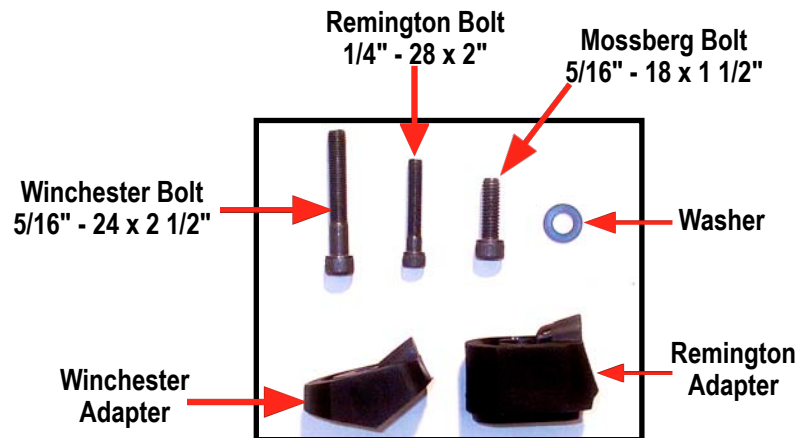


Figure 3

**Advanced Technology International • Made In the USA • Limited Lifetime Warranty**

2733 West Carmen Ave • Milwaukee, WI 53209

Toll Free: 800.925.2522 • Fax: 414.464.3112

**www.ATIGunstocks.com**



# Tactical Top Folding Stock

## Installation Instructions

**PART# TFS0600, MTF4900, A.1.20.1155, A.1.40.1155**

(Fits: 12 Ga Mossberg 500/535/590/835, Remington 870, Winchester 1200/1300, Maverick 88)

Thank you for purchasing an ATI product!

**Advanced Technology**  
INTERNATIONAL



### Stock Installation

#### Step #5

Place the bolt with supplied washer through the back of the grip and adapter (if used).

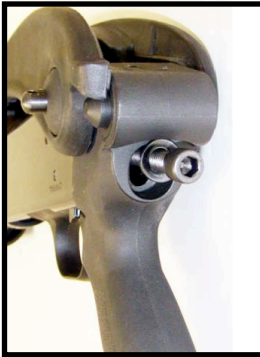


Figure 4

#### Step #6

Secure the bolt to the receiver by tightening the bolt using the proper allen wrench.



Figure 5

#### Step #7

The stock comes with a sling swivel stud mounted on the left side, for right handed shooters. If you are left handed, unscrew the sling swivel stud and remove the cap from the pivot pin then mount it on the opposite side.



Figure 6

#### Modification to Lower Top Folding Arm

If the top folding arm is not sitting flush against the shotgun receiver, use a file or dremel tool to remove material from the notch on the top of the folding arm. File and check often against the receiver for the proper fit.



Figure 7A



Figure 7B

**Advanced Technology International • Made In the USA • Limited Lifetime Warranty**

2733 West Carmen Ave • Milwaukee, WI 53209

Toll Free: 800.925.2522 • Fax: 414.464.3112

**www.ATIGunstocks.com**